



1130 Series 中型

30系列(台湾)美规脚架系列

Medium Duty General Purposes Caster (American Style)

载重 Load
70 - 250 kg

- 脚架采特别结构设计·荷重高·转动灵活·有侧煞制动及双煞制动可供选择。
- Pressed steel caster horn/ housing design to swivel easily under load.
Good performance side brake and total lock brake for options.



▶ 特色区 Features



30新式固定架(咨询工厂)
Reinforced Rigid Fork
(consult factory)



铁双煞(超大踏板)
Total Lock Brake
with Extra Big Pedal



波西煞
Posi Lock Brake



波盘防尘盖
Swivel Dust Cover



滚珠轴承 Ball Bearing
滚珠轴承 Ball Bearing

中管 Plain Bearing

* 请联络工厂
Please consult the factory.



铁双煞(长踏)
Total Lock Brake
with Long Pedal (standard)



铁双煞(短踏)
Total Lock Brake
with Short Pedal



侧煞
Side Lock Brake



角铁底板
Angle Bar Plate



加高底板
Adjustable Top Plate

▶ 轮子选项 Wheel Options



高科技耐磨聚氨酯
PU on PP Core



超级人造胶(514)
TPR on PP Core



尼龙轮
Nylon



WMRC轮
WMRC



WPP轮
WPP



W超级人造胶
WPPR



NPPR轮
NPPR



铝芯橡胶轮
Rubber on Aluminum Core



超级人造胶(515)
TPR on PP Core



铝芯AQPU
QPU on AL Core



橡胶轮
Rubber



塑料轮
PP



导电轮
E-Conductive



耐高温轮
Hi-temp



W全效轮
W Resolute



全效轮(514)
Resolute



WHDR轮
WHDR



CPD轮
CPD



蓝色弹力轮
Blue Resilient Rubber Wheel



全效轮(515)
Resolute



三星轮
Rubber on Steel Core



超级人造胶(大圆弧)
TPR on PP Core (Donut)



全效轮(大圆弧)
Resolute (Donut)



» 底板规格 TOP PLATE SIZE AND BOLT HOLE SPACING

编号 Suffix	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安装尼帽尺寸 Attaching Bolt Size
1	61 x 93 mm (2-3/8" x 3-5/8")	45x75 mm(高级架底板) 1 -3/4"x3"	6.35 mm (1/4")
2	72 x 91 mm (2-13/16" x 3-19/32")	53x72 mm(医疗/仪器架底板) 2-1/8"x2-7/8"	6.35 mm (1/4")
3	93 x 110 mm (3-5/8" x 4-3/8")	70 x 85 mm(大底板)(Big Plate) 2-5/8"~3"x3"~3-5/8"	9.5 mm (3/8")

» 插杆规格 CYLINDRICAL STEM SPECIFICATION

编号 Suffix	插杆直径 x 长度 Diameter x Length	编号 Suffix	插杆直径 x 长度 Diameter x Length
1	11X38mm (7/16"diameter X 1-1/2")	2	21.6X56mm (0.845"diameter X 2-3/16")
3	22X56mm (0.865"diameter X 2-3/16")		

» 丝扣规格 THREADED STEM SPECIFICATION


编号 Suffix	丝扣牙径 x 长度 Threaded Size	编号 Suffix	丝扣牙径 x 长度 Threaded Size	编号 Suffix	丝扣牙径 x 长度 Threaded Size
1	3/8-16UNCx19 **	2	3/8-16UNCx25 **	3	3/8-16UNCx32 *
4	3/8-16UNCx38 **	5	1/2-12UNCx19 **	6	1/2-12UNCx25 **
7	1/2-12UNCx32 *	8	1/2-12UNCx38 **	9	1/2-13UNCx19 **
10	1/2-13UNCx25 **	11	1/2-13UNCx32 *	12	1/2-13UNCx38 **
13	1/2-13UNCx70 **	14	5/8-11UNCx25 **	15	5/8-11UNCx32 *
16	M16-2.0x20 *				

* 丝扣底部六角台阶 (Hexagon Head)

** 丝扣底部圆头台阶 (Round Head)

» APP 四件套 RUBBER EXPANDING ADAPTERS SPECIFICATION


APP 号码 Adapter Number	方/圆管内径 ID of Round or Square Tube	通用管子内径范围 Tube Size Range	APP 零件 Adapter Kit Parts			
			橡胶圈 Rubber Bushing	浪花螺母 Top Knurled Nut	塑料垫片 Plastic Bushing	金属华司 Base Washer
9	3/4	0.720-0.851	1644-00	1421-02	1429-02	1709-02
11*	7/8	0.852-0.927	1645-00	1435-02	1432-02	1709-02
13	1	0.928-1.029	1646-00	1435-02	1432-02	1709-02
15	1-1/8	1.030-1.140	1647-00	1436-02	1431-02	1709-02
17B	1-3/16	1.178-1.303	1651-00	1441-02	1430-02	1709-02
19C*	1-3/8	1.360-1.425	1648-00	1438-02	1433-02	1709-02
19A	1-1/2	1.426-1.589	1649-00	1437-02	1434-02	1709-02
21	1-7/8	1.790-1.850	1650-00	1422-02	1440-02	1473-02

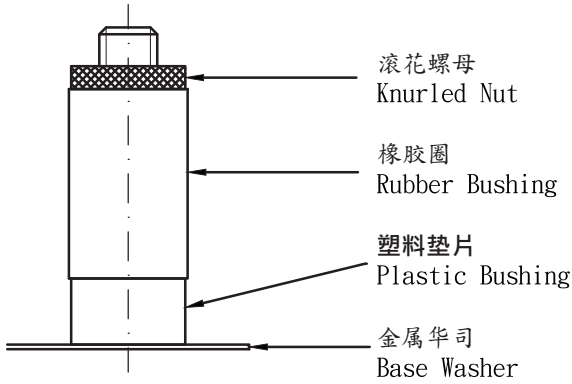


APP四件套 Rubber Expanding Adapters

角铁底板规格 ANGLE BAR PLATE SPECIFICATION

2孔规格 Two Holes Specification

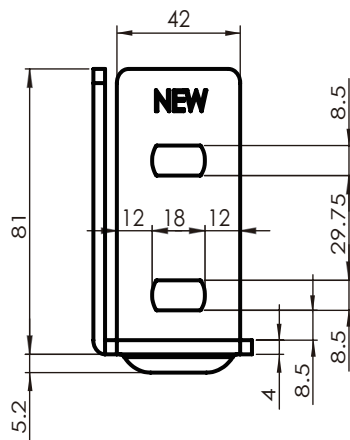

3孔规格 Three Holes Specification

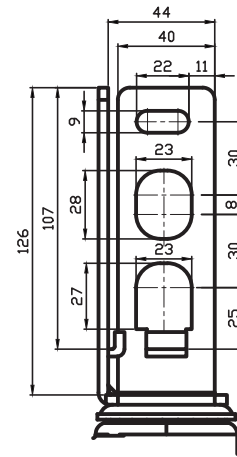

轮径x轮宽 DiameterxWidth	载重 Load	材质 Material	型号 Item No.			轴承 Bearing	总高 Overall Height	回旋半径 Swivel radius
			固定 Fixed	活动 Swivel	刹车 Brake			
75mm x 24mm (3" x 1")	40 kgs (88 lbs)	超级人造胶 TPR on PP Core	1130-R-03-75-1	1130-R-03-75-2	1130-R-03-75-4	滚珠 Ball Bearing	底板类总高: Plate Version OAH: 有铁防尘盖 with dust cover 106mm(4-3/16") 无铁防尘盖 without dust cover 105mm(4-1/8")	活动 73 mm 侧煞 73 mm 煞车(短踏板) 111 mm 煞车(长踏板) 121 mm 煞车(超大踏板) 140 mm 波西煞 105 mm
	50 kgs (110 lbs)	全效轮 Resolute	1130-R-03-68-1	1130-R-03-68-2	1130-R-03-68-4			
75mmx32mm (3"x1-1/4")	90kgs (198lbs)	超级人造胶 TPR on PP Core	1130-03-75-1	1130-03-75-2	1130-03-75-4	滚珠 Ball Bearing	丝扣/插杆类总高 Stem Version OAH: 有铁防尘盖 with dust cover 102mm(4-1/16") 无铁防尘盖 without dust cover 101mm(4") 两孔角铁底板总高 Two holes angle bar plate OAH: 106.1mm(4-11/64")	Swivel 73 mm Swivel W/Side Brake 73 mm Swivel W/Brake (Shorter pedal) 111 mm Swivel W/Brake (Long pedal) 121 mm Swivel W/Brake (Extra Big Pedal) 140 mm
	90kgs (198lbs)	全效轮 Resolute	1130-03-68-1	1130-03-68-2	1130-03-68-4			
	80kgs (175lbs)	导电轮 E-Conductive	1130-03-17-1	1130-03-17-2	1130-03-17-4			
	160kgs (352lbs)	WMRC轮 WMRC	1130-03-45-1	1130-03-45-2	1130-03-45-4			
	100kgs (220lbs)	WPP轮 WPP	1130-03-46-1	1130-03-46-2	1130-03-46-4			
	90kgs (198lbs)	W超级人造胶 WPPR	1130-03-47-1	1130-03-47-2	1130-03-47-4			
	110kgs (250lbs)	W全效轮 W Resolute	1130-03-48-1	1130-03-48-2	1130-03-48-4			
	140kgs (310lbs)	WHDR轮 WHDR	1130-03-66-1	1130-03-66-2	1130-03-66-4			
	160kgs (352lbs)	铝芯AQPU QPU on AL core	1130-03-87-1	1130-03-87-2	1130-03-87-4	中管 Plain Bearing	三孔角铁底板总高 Three holes angle bar plate OAH: 125mm(4-59/64")	Posi Lock Brake 105 mm
	100kgs (220lbs)	尼龙轮 Nylon	1130-03-07-1	1130-03-07-2	1130-03-07-4			
	70kgs (155lbs)	橡胶轮 Rubber	1130-03-06-1	1130-03-06-2	1130-03-06-4			
	90kgs (198lbs)	塑料轮 PP	1130-03-29-1	1130-03-29-2	1130-03-29-4			



 轮径x轮宽 DiameterxWidth	 载重 Load	 材质 Material	 型号 Item No.			 轴承 Bearing	 总高 Overall Height	 回旋半径 Swivel radius
			固定 Fixed	活动 Swivel	刹车 Brake			
88mmx32mm (3.5"x1-1/4")	95kgs (209lbs)	W超级人造胶 WPPR	1130-35-47-1	1130-35-47-2	1130-35-47-4	滚珠 Ball Bearing	底板类总高: Plate Version OAH: 有铁防尘盖 with dust cover 117mm(4-5/8") 无铁防尘盖 without dust cover 116mm(4-9/16")	活动 80 mm 侧煞 80 mm 煞车(短踏板) 111 mm 煞车(长踏板) 121 mm 煞车(超大踏板) 140 mm 波西煞 114 mm
	120kgs (264lbs)	W全效轮 W Resolute	1130-35-48-1	1130-35-48-2	1130-35-48-4		丝扣/插杆类总高: Stem Version OAH: 有铁防尘盖 with dust cover 113mm(4-7/16") 无铁防尘盖 without dust cover 112mm(4-3/8")	Swivel 80 mm Swivel W/Side Brake 80 mm Swivel W/Brake (Shorter pedal) 111 mm Swivel W/Brake (Long pedal) 121 mm Swivel W/Brake (Extra Big Pedal) 140 mm Posi Lock Brake 114 mm
	160kgs (350lbs)	WHDR轮 WHDR	1130-35-66-1	1130-35-66-2	1130-35-66-4		两孔角铁底板总高 Two holes angle bar plate OAH: 117mm(4-39/64")	
100mm x 24mm (4" x 1")	50 kgs (110 lbs)	超级人造胶 TPR on PP Core	1130-R-04-75-1	1130-R-04-75-2	1130-R-04-75-4	滚珠 Ball Bearing		
	55 kgs (121 lbs)	全效轮 Resolute	1130-R-04-68-1	1130-R-04-68-2	1130-R-04-68-4			
100mmx32mm (4"x1-1/4")	120kgs (265lbs)	高科技耐磨聚氨酯 PU on PP Core	1130-04-31-1	1130-04-31-2	1130-04-31-4	滚珠 Ball Bearing 中管 Plain Bearing	底板类总高 Plate Version OAH: 有铁防尘盖 with dust cover 130mm(5-1/8") 无铁防尘盖 without dust cover 129mm(5-1/16")	活动 85 mm 侧煞 85 mm 煞车(短踏板) 111 mm 煞车(长踏板) 121 mm 煞车(超大踏板) 140 mm 波西煞 115 mm
	100kgs (220lbs)	超级人造胶 TPR on PP Core	1130-04-75-1	1130-04-75-2	1130-04-75-4			
	80kgs (175lbs)	超级人造胶(大圆弧) TPR on PP Core (Donut)	1130-04-110-1	1130-04-110-2	1130-04-110-4			
	90kgs (198lbs)	全效轮(大圆弧) Resolute (Donut)	1130-04-111-1	1130-04-111-2	1130-04-111-4			
	125kgs (275lbs)	全效轮 Resolute	1130-04-68-1	1130-04-68-2	1130-04-68-4	滚珠 Ball Bearing	丝扣/插杆类总高 Stem Version OAH: 有铁防尘盖 with dust cover 126mm(5") 无铁防尘盖 with out dust cover 125mm(4-15/16")	Swivel 85 mm Swivel W/Side Brake 85 mm Swivel W/Brake (Shorter pedal) 111 mm Swivel W/Brake (Long pedal) 121 mm Swivel W/Brake (Extra Big Pedal) 140 mm Posi Lock Brake 115 mm
	80kgs (176lbs)	导电轮 E-Conductive	1130-04-17-1	1130-04-17-2	1130-04-17-4			
	180kgs (396lbs)	WMRC轮 WMRC	1130-04-45-1	1130-04-45-2	1130-04-45-4			
	130kgs (285lbs)	WPP轮 WPP	1130-04-46-1	1130-04-46-2	1130-04-46-4			
	100kgs (220lbs)	W超级人造胶 WPPR	1130-04-47-1	1130-04-47-2	1130-04-47-4			
	135kgs (300lbs)	W全效轮 W Resolute	1130-04-48-1	1130-04-48-2	1130-04-48-4			
	180kgs (400lbs)	WHDR轮 WHDR	1130-04-66-1	1130-04-66-2	1130-04-66-4			
	135kgs (300lbs)	铝芯橡胶轮 Rubber on Aluminum Core	1130-04-22-1	1130-04-22-2	1130-04-22-4			
	230kgs (506lbs)	铝芯AQP QPU on AL Core	1130-04-87-1	1130-04-87-2	1130-04-87-4			
	70kgs (154lbs)	NPPR轮 NPPR	1130-04-67-1	1130-04-67-2	1130-04-67-4	中管 Plain Bearing	三孔角铁底板总高 Three holes angle bar plate OAH: 148mm(5-53/64")	
	120kgs (265lbs)	尼龙轮 Nylon	1130-04-07-1	1130-04-07-2	1130-04-07-4			
	80kgs (176lbs)	橡胶轮 Rubber	1130-04-06-1	1130-04-06-2	1130-04-06-4			
	90kgs (198lbs)	塑料轮 PP	1130-04-29-1	1130-04-29-2	1130-04-29-4			
	135kgs (300lbs)	耐高温轮 Hi-temp	1130-04-25-1	1130-04-25-2	1130-04-25-4			



 轮径x轮宽 DiameterxWidth	 载重 Load	 材质 Material	 型号 Item No.			 轴承 Bearing	 总高 Overall Height	 回旋半径 Swivel radius
			固定 Fixed	活动 Swivel	刹车 Brake			
100mmx36mm (4"x1-1/2")	120kgs (265 lbs)	三星轮 Rubber on Steel Core	1130-04-03-1	1130-04-03-2	1130-04-03-4	滚珠 Ball Bearing	底板类总高 Plate Version OAH: 有铁防尘盖 with dust cover 130mm(5-1/8") 无铁防尘盖 without dust cover 129mm(5-1/16")	活动 85 mm 侧煞 85 mm 煞车(短踏板) 111 mm 煞车(长踏板) 121 mm 煞车(超大踏板) 140 mm 波西煞 115 mm
	160kgs (352 lbs)	CPD轮 CPD	1130-04-71-1	1130-04-71-2	1130-04-71-4		丝扣/插杆类总高 Stem Version OAH: 有铁防尘盖 with dust cover 126mm(5") 无铁防尘盖 without dust cover 125mm(4-15/16")	Swivel 85 mm Swivel W/Side Brake 85 mm Swivel W/Brake (Shorter pedal) 111 mm
	160kgs (352 lbs)	蓝色弹力轮 Blue Resilient Rubber Wheel	1130-04-50-1	1130-04-50-2	1130-04-50-4		两孔角铁底板总高 Two holes angle bar plate OAH: 129mm(5-1/16")	Swivel W/Brake (Long pedal) 121 mm Swivel W/Brake (Extra Big Pedal) 140 mm
	140kgs (308 lbs)	超级人造胶 TPR on PP Core	1130-04-77-1	1130-04-77-2	1130-04-77-4		三孔角铁底板总高 Three holes angle bar plate OAH: 148mm(5-53/64")	Posi Lock Brake 115 mm
	160kgs (352 lbs)	全效轮 Resolute	1130-04-76-1	1130-04-76-2	1130-04-76-4			
	250kgs (550 lbs)	铝芯AQPU QPU on AL core	1130-04-87-1	1130-04-87-2	1130-04-87-4			
125mm x 24.5mm (5" x 1")	70 kgs (155 lbs)	超级人造胶 TPR on PP Core	1130-R-05-75-1	1130-R-05-75-2	1130-R-05-75-4	滚珠 Ball Bearing	底板类总高 Plate Version OAH: 有铁防尘盖 with dust cover 158mm(6-1/4") 无铁防尘盖 without dust cover 157mm(6-3/16")	活动 97 mm 侧煞 97 mm 煞车(短踏板) 111 mm 煞车(长踏板) 121 mm 煞车(超大踏板) 140 mm 波西煞 112 mm
	80 kgs (175 lbs)	全效轮 Resolute	1130-R-05-68-1	1130-R-05-68-2	1130-R-05-68-4			
125mmx32mm (5"x1-1/4")	130kgs (285lbs)	高科技耐磨聚氨酯 PU on PP Core	1130-05-31-1	1130-05-31-2	1130-05-31-4	滚珠 Ball Bearing 中管 Plain Bearing	丝扣/插杆类总高 Stem Version OAH: 有铁防尘盖 with dust cover 154mm(6-1/16") 无铁防尘盖 without dust cover 153mm(6")	Swivel 97 mm Swivel W/Side Brake 97 mm Swivel W/Brake (Shorter pedal) 111 mm Swivel W/Brake (Long pedal) 121 mm Swivel W/Brake (Extra Big Pedal) 140 mm Posi Lock Brake 112 mm
	110kgs (240lbs)	超级人造胶 TPR on PP Core	1130-05-75-1	1130-05-75-2	1130-05-75-4			
	100kgs (220lbs)	超级人造胶(大圆弧) TPR on PP Core (Donut)	1130-05-110-1	1130-05-110-2	1130-05-110-4			
	120kgs (265lbs)	全效轮(大圆弧) Resolute (Donut)	1130-05-111-1	1130-05-111-2	1130-05-111-4			
	147kgs (325lbs)	全效轮 Resolute	1130-05-68-1	1130-05-68-2	1130-05-68-4	滚珠 Ball Bearing	两孔角铁底板总高 Two holes angle bar plate OAH: 157mm(6-3/16")	
	90kgs (198lbs)	导电轮 E-Conductive	1130-05-17-1	1130-05-17-2	1130-05-17-4			
	200kgs (440lbs)	WMRC轮 WMRC	1130-05-45-1	1130-05-45-2	1130-05-45-4			
	150kgs (330lbs)	WPP轮 WPP	1130-05-46-1	1130-05-46-2	1130-05-46-4			
	110kgs (240lbs)	W超级人造胶 WPPR	1130-05-47-1	1130-05-47-2	1130-05-47-4			
	147kgs (325lbs)	W全效轮 W Resolute	1130-05-48-1	1130-05-48-2	1130-05-48-4			
	200kgs (440lbs)	WHDR轮 WHDR	1130-05-66-1	1130-05-66-2	1130-05-66-4	中管 Plain Bearing	三孔角铁底板总高 Three holes angle bar plate OAH: 176mm(6-59/64")	
	250kgs (550lbs)	铝芯AQPU QPU on AL core	1130-05-87-1	1130-05-87-2	1130-05-87-4			
	140kgs (305lbs)	尼龙轮 Nylon	1130-05-07-1	1130-05-07-2	1130-05-07-4			
	90kgs (198lbs)	橡胶轮 Rubber	1130-05-06-1	1130-05-06-2	1130-05-06-4			
	100kgs (220lbs)	塑料轮 PP	1130-05-29-1	1130-05-29-2	1130-05-29-4			



 轮径x轮宽 DiameterxWidth	 载重 Load	 材质 Material	 型号 Item No.			 轴承 Bearing	 总高 Overall Height	 回旋半径 Swivel radius
			固定 Fixed	活动 Swivel	刹车 Brake			
125mmx36mm (5"x1-1/2")	140kgs (308 lbs)	三星轮 Rubber on Steel Core	1130-05-03-1	1130-05-03-2	1130-05-03-4	滚珠 Ball Bearing	底板类总高 Plate Version OAH: 有铁防尘盖 with dust cover 158mm(6-1/4") 无铁防尘盖 without dust cover 157mm(6-3/16") 棘扣/插桿類總高 Stem Version OAH: 有铁防尘盖 with dust cover 154mm(6-1/16") 无铁防尘盖 without dust cover 153mm(6") 两孔角铁底板总高 Two holes angle bar plate OAH: 157mm(6-3/16") 三孔角铁底板总高 Three holes angle bar plate OAH: 176mm(6-59/64")	活动 97 mm 侧煞 97 mm 煞車(短踏板) 111 mm 煞車(长踏板) 121 mm 煞車(超大踏板) 140 mm 波西煞 112 mm
	200kgs (440 lbs)	CPD轮 CPD	1130-05-71-1	1130-05-71-2	1130-05-71-4			
	250kgs (550 lbs)	蓝色弹力轮 Blue Resilient Rubber Wheel	1130-05-50-1	1130-05-50-2	1130-05-50-4			Swivel 97 mm Swivel W/Side Brake 97 mm Swivel W/Brake (Shorter pedal) 111 mm
	160kgs (352lbs)	超级人造胶 TPR on PP Core	1130-05-77-1	1130-05-77-2	1130-05-77-4			Swivel W/Brake (Long pedal) 121 mm Swivel W/Brake (Extra Big Pedal) 140 mm Posi Lock Brake 112 mm
	180kgs (400lbs)	全效轮 Resolute	1130-05-76-1	1130-05-76-2	1130-05-76-4			