

**1133 Series** 中型**33系列(美規腳架/美規超市車輪系列)**

Shopping Cart Caster (American Style)

- 采用特别脚架荷重结构设计, 转动灵活, 侧刹制动效果良好。
- Special yoke design with easy swivel; Good performance side brake.




» 特色区 Features

侧煞
Side Lock BrakeAPP三件套
APP-Expanding
adapters波盘防尘盖
Swivel Dust Cover

» APP 四 件 套 RUBBER EXPANDING ADAPTERS SPECIFICATION

APP 号码 Adapter Number	方/圆管内径 ID of Round or Square Tube	通用管子内径范围 Tube Size Range	APP 零件 Adapter Kit Parts			
			橡胶圈 Rubber Bushing	滚花螺母 Top Knurled Nut	塑料垫片 Plastic Bushing	金属华司 Base Washer
9	3/4	0.720-0.851	1644-00	1421-02	1429-02	1709-02
11*	7/8	0.852-0.927	1645-00	1435-02	1432-02	1709-02
13	1	0.928-1.029	1646-00	1435-02	1432-02	1709-02
15	1-1/8	1.030-1.140	1647-00	1436-02	1431-02	1709-02
17B	1-3/16	1.178-1.303	1651-00	1441-02	1430-02	1709-02
19C*	1-3/8	1.360-1.425	1648-00	1438-02	1433-02	1709-02
19A	1-1/2	1.426-1.589	1649-00	1437-02	1434-02	1709-02
21	1-7/8	1.790-1.850	1650-00	1422-02	1440-02	1473-02

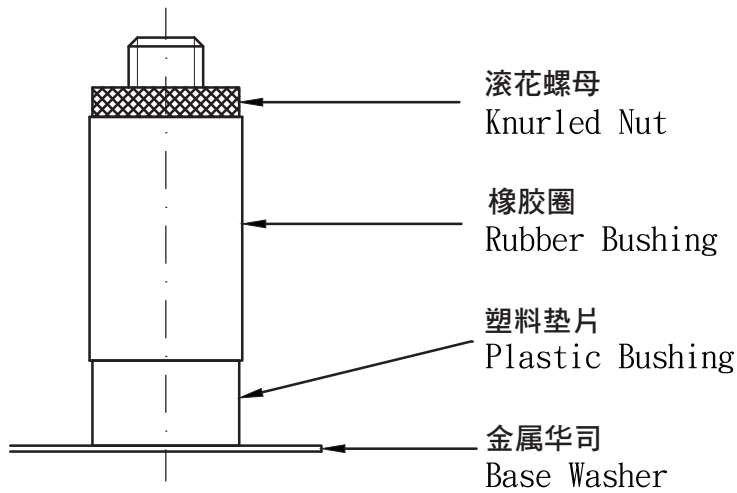

APP四件套 Rubber Expanding Adapters

轮子选项 Wheel Options



底板规格 TOP PLATE SIZE AND BOLT HOLE SPACING

编号 Suffix	底板尺寸 Top Plate Size	底板孔距 Bolt Hole Spacing	安装尼帽尺寸 Attaching Bolt Size
1	69 x 96 mm (2-23/32"x 3-25/32")	45 x 75 mm (高级架底板) 1-3/4"x 3"	6.35 mm (1/4")
2	80 x 105 mm (3-1/8"x 4-1/8")	60 x 85 mm (美规孔距) 2-3/8"x 3-7/16"(American Plate)	8 mm (5/16")

插杆规格 CYLINDRICAL STEM SPECIFICATION

编号 Suffix	插杆直径x长度 Diameter x Length	孔位高度 Hole Height	孔尺寸 Bore Size
4" 5"	21.6X56mm	—	C型环 (Grip Ring)
4" 5"	方18x21.6x51L SQ	31.7	10.5mm
4" 5"	方21.6x21.6x51L SQ	26	8.5mm

丝扣规格 THREADED STEM SPECIFICATION

编号 Suffix	丝扣牙径 x 长度 Threaded Size	编号 Suffix	丝扣牙径 x 长度 Threaded Size	编号 Suffix	丝扣牙径 x 长度 Threaded Size
1	1/2 x 13UNC x 25 mm	2	1/2 x 13UNC x 45 mm	3	1/2 x 13UNC x 70 mm



 轮径x轮宽 DiameterxWidth	 载重 Load	 材质 Material	 型号 Item No.			 轴承 Bearing	 总高 Overall Height	 回旋半径 Swivel radius
			固定 Fixed	活动 Swivel	刹车 Brake			
75mmx32mm (3"x1-1/4")	160kgs (352 lbs)	WMRC轮 WMRC	1133-03-45-1	1133-03-45-2	1133-03-45-4	滚珠 Ball Bearing	螺丝总高 103cm 插杆总高 102.5cm 底板总高 107cm	活动 71mm 侧刹 92mm 波西刹102mm Swivel 71mm Swivel W/Side Brake 73mm Posi lock Brake 102mm
	100 kgs (220 lbs)	WPP轮 WPP	1133-03-46-1	1133-03-46-2	1133-03-46-4			
	90 kgs (198 lbs)	W超级人造胶 WPPR	1133-03-47-1	1133-03-47-2	1133-03-47-4			
	110 kgs (250 lbs)	W全效轮 W Resolute	1133-03-48-1	1133-03-48-2	1133-03-48-4			
	140 kgs (310 lbs)	WHDR轮 WHDR	1133-03-66-1	1133-03-66-2	1133-03-66-4			
	100 kgs (220 lbs)	高科技耐磨聚氨酯 PU on PP Core	1133-03-31-1	1133-03-31-2	1133-03-31-4	滚珠 Ball Bearing 中管 Plain Bearing		
	90 kgs (198 lbs)	超级人造胶 TPR on PP Core	1133-03-75-1	1133-03-75-2	1133-03-75-4			
	80 kgs (175 lbs)	导电轮 E-Conductive	1133-03-17-1	1133-03-17-2	1133-03-17-4	中管 Plain Bearing		
	100 kgs (220 lbs)	尼龙轮 Nylon	1133-03-07-1	1133-03-07-2	1133-03-07-4			
	70 kgs (155 lbs)	橡胶轮 Rubber	1133-03-06-1	1133-03-06-2	1133-03-06-4			
	90 kgs (198 lbs)	塑料轮 PP	1133-03-29-1	1133-03-29-2	1133-03-29-4			
100mmx32mm (4"x1-1/4")	180 kgs (396 lbs)	WMRC轮 WMRC	1133-04-45-1	1133-04-45-2	1133-04-45-4	滚珠 Ball Bearing	螺丝总高 126cm 插杆总高 125.5cm 底板总高 130cm	活动 82mm 侧刹 92mm 波西刹 108mm Swivel 82mm Swivel W/Side Brake 83mm Posi lock Brake 108mm
	130 kgs (285 lbs)	WPP轮 WPP	1133-04-46-1	1133-04-46-2	1133-04-46-4			
	100 kgs (220 lbs)	W超级人造胶 WPPR	1133-04-47-1	1133-04-47-2	1133-04-47-4			
	135 kgs (300 lbs)	W全效轮 W Resolute	1133-04-48-1	1133-04-48-2	1133-04-48-4			
	180 kgs (400 lbs)	WHDR轮 WHDR	1133-04-66-1	1133-04-66-2	1133-04-66-4			
	120 kgs (265 lbs)	高科技耐磨聚氨酯 PU on PP Core	1133-04-31-1	1133-04-31-2	1133-04-31-4	滚珠 Ball Bearing 中管 Plain Bearing		
	100 kgs (220 lbs)	超级人造胶 TPR on PP Core	1133-04-75-1	1133-04-75-2	1133-04-75-4			
	80 kgs (176 lbs)	导电轮 E-Conductive	1133-04-17-1	1133-04-17-2	1133-04-17-4			
	120 kgs (265 lbs)	尼龙轮 Nylon	1133-04-07-1	1133-04-07-2	1133-04-07-4	中管 Plain Bearing		
	135 kgs (300 lbs)	耐高温轮 Hi-temp	1133-04-25-1	1133-04-25-2	1133-04-25-4			
	80 kgs (175 lbs)	橡胶轮 Rubber	1133-04-06-1	1133-04-06-2	1133-04-06-4			
	90 kgs (198 lbs)	塑料轮 PP	1133-04-29-1	1133-04-29-2	1133-04-29-4			
100mmx34mm (4"x1-1/2")	140 kgs (310lbs)	蓝色弹力全效轮 Blue Resilient Resolute Rubber	1133-04-76-1	1133-04-76-2	1133-04-76-4		滚珠 Ball Bearing	129mm (5-1/8")
125mmx32mm (5"x1-1/4")	113 kgs (250 lbs)	阻力轮(平地轮) FRICTION WHEEL	1133-05-72-1	1133-05-72-2	1133-05-72-4	滚珠 Ball Bearing	螺丝总高 150cm 插杆总高 149.5cm 底板总高 154cm	活动 96mm 侧刹 96mm 波西刹 114mm Swivel 96mm Swivel W/Side Brake 96mm Posi lock Brake 114mm
	200 kgs (440 lbs)	WMRC轮 WMRC	1133-05-45-1	1133-05-45-2	1133-05-45-4			
	150 kgs (330 lbs)	WPP轮 WPP	1133-05-46-1	1133-05-46-2	1133-05-46-4			
	110 kgs (240 lbs)	W超级人造胶 WPPR	1133-05-47-1	1133-05-47-2	1133-05-47-4			
	147 kgs (325 lbs)	W全效轮 W Resolute	1133-05-48-1	1133-05-48-2	1133-05-48-4			
	200 kgs (440 lbs)	WHDR轮 WHDR	1133-05-66-1	1133-05-66-2	1133-05-66-4			
	113 kgs (250 lbs)	高科技耐磨聚氨酯(平地轮) PU on PP Core	1133-05-39-1	1133-05-39-2	1133-05-39-4			
	113 kgs (250lbs)	超级橡胶轮 Super Wheel (Rubber)	11330500511	11330500512	11330500514			
	113 kgs (250lbs)	超级橡胶阻力轮 Super Friction Wheel(Rubber)	11330500511	11330500512	11330500514	滚珠 Ball Bearing 中管 Plain Bearing		
	130 kgs (285 lbs)	高科技耐磨聚氨酯 PU on PP Core	1133-05-31-1	1133-05-31-2	1133-05-31-4			
	110 kgs (240 lbs)	超级人造胶 TPR on PP Core	1133-05-75-1	1133-05-75-2	1133-05-75-4			
	113 kgs (250 lbs)	导电轮(平地轮) E-Conductive	1133-05-17-1	1133-05-17-2	1133-05-17-4			
	140 kgs (305 lbs)	尼龙轮 Nylon	1133-05-07-1	1133-05-07-2	1133-05-07-4	中管 Plain Bearing		
	90 kgs (198 lbs)	橡胶轮 Rubber	1133-05-06-1	1133-05-06-2	1133-05-06-4			
	100 kgs (220 lbs)	塑料轮 PP	1133-05-29-1	1133-05-29-2	1133-05-29-4			
125mmx36mm (5"x1-1/2")	160 kgs (352lbs)	蓝色弹力全效轮 Blue Resilient Resolute Rubber	1133-05-76-1	1133-05-76-2	1133-05-76-4	滚珠 Ball Bearing	155mm (6-1/8")	