

VPU系列

超高负载重型轮

PU外包+铁芯/铸铁芯

	轮面硬度		92° shore A
	温度范围		-30°C to +70°C
	滚动顺畅		优秀
	音量		良好
	保护地板		良好



轮面


由高品质聚氨酯制成。得胜硬度92°的PU轮不仅提供良好的地板保护作用，而且低噪音。得胜PU轮有着优秀的抗水解特性，适用热带地区及潮湿的工作环境。

轮框

内框：铁芯/铸铁芯

特色

- 抗化学、溶剂及侵蚀
- 耐磨
- 抗微生物
- 适用环境温度：-30°C ~ +70°C
- 在正常使用情况下，无需维修

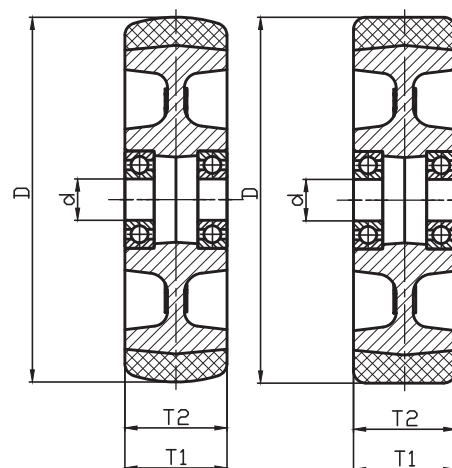

 品号	 轮径 (D) [mm]	 轮宽 (T2) [mm]	 载重 [kg] (lbs)	 轴承内径 Ø(d) [mm]	 中宽 (T1) [mm]	 轮面	 轴承
12035106186171	150	42	700 kgs (1543lbs)	17	42	圆弧	精密滚珠 轴承
12035106186271	150	42	700 kgs (1543lbs)	20	42		
12035106306171	150	75	1100 kgs (2425lbs)	20	75		
12035106306271	150	75	1100 kgs (2425lbs)	25	75		
12035107206171	180	50	850 kgs (1874lbs)	20	50		
12035107206271	180	50	850 kgs (1874lbs)	25	50		
12035108206171	200	50	1000 kgs (2205lbs)	20	50		
12035108206271	200	50	1000 kgs (2205lbs)	25	50		
12036908206471	200	50	1000 kgs (2205lbs)	30	50		
12036908206571	200	50	1000 kgs (2205lbs)	35	50		
12036908206671	200	50	1000 kgs (2205lbs)	40	50		
12035110256171	250	62	1500 kgs (3307lbs)	20	61		
12035110256271	250	62	1500 kgs (3307lbs)	25	61		
12035110256371	250	62	1500 kgs (3307lbs)	30	61		
12034110256471	250	62	1500 kgs (3307lbs)	35	61		
12035112356171	300	90	1800 kgs (3968lbs)	30	90		
12035112356271	300	90	1800 kgs (3968lbs)	35	90		
12035114356201	350	90	2200 kgs (4850lbs)	35	90		
12035114356101	350	90	2200 kgs (4850lbs)	40	90		
12035114356301	350	90	2200 kgs (4850lbs)	45	90		
12035114356401	350	90	2200 kgs (4850lbs)	50	90		
12035110306171	250	80	2000 kgs (4409lbs)	25	90	平面	
12035110306271	250	80	2000 kgs (4409lbs)	30	90		
12035110306371	250	80	2000 kgs (4409lbs)	35	90		
12035112356371	300	90	2400 kgs (5291lbs)	30	90		
12035112356471	300	90	2400 kgs (5291lbs)	35	90		
12035116406171	400	100	2800 kgs (6190lbs)	35	100		
12035116406271	400	100	2800 kgs (6190lbs)	40	100		
12035116406371	400	100	2800 kgs (6190lbs)	45	100		
12035116406471	400	100	2800 kgs (6190lbs)	50	100		